


# SPF 6000T DVM-G2

- Industry-leading efficiency up to 93%
- Extended surge rating suitable for motor loads
- Wide PV input voltage range up to 250Vdc
- Parallel for high scalability
- Warranty extend to 5 years

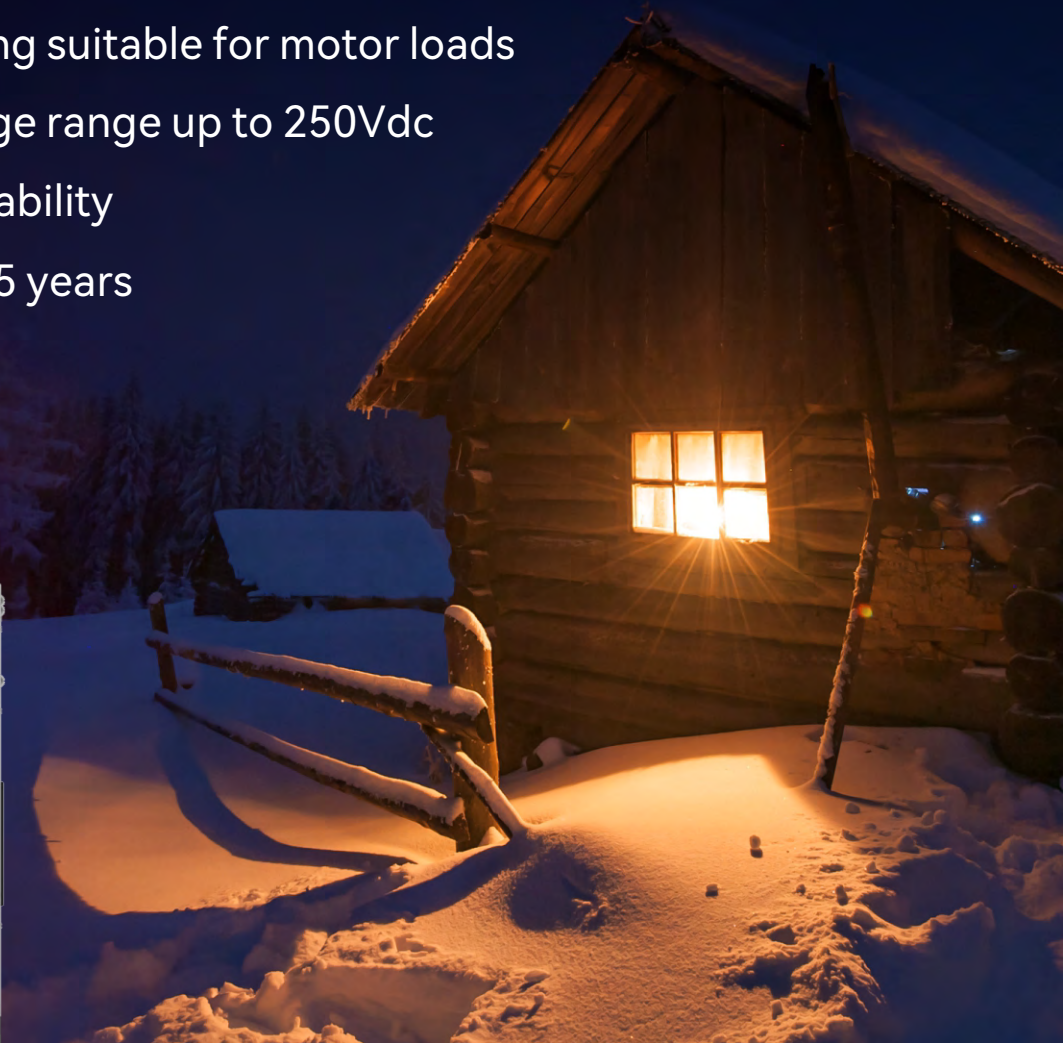

P O W E R  
- I N G O  
T O M O -  
R R O W O

**GROWATT**

[www.ginverter.com](http://www.ginverter.com)

Datasheet	SPF 6000T DVM-G2
Battery voltage	48VDC
Battery type	Lithium/Lead-acid
<b>Inverter output</b>	
Rated power	6000VA / 6000W
Parallel capability	Yes, 6 units maximum (Available in single phase system)
AC voltage regulation (battery mode)	104-110-115-120/208-220-230-240VAC (Optional)
Surge power	18000VA
Efficiency (Peak)	93%
Waveform	Pure sine wave
Transfer time	10ms
<b>Solar charger</b>	
Maximum PV array power	4500W
MPPT range @ operating voltage	60VDC ~ 200VDC
Number of Independent MPP trackers/ strings per MPP tracker	1/1
Maximum PV array open circuit voltage	250VDC
Maximum solar charge current	80A
Maximum efficiency	97%
<b>AC charger</b>	
Charge current	60A
AC Input voltage	240 VAC
Selectable voltage range	184-272 VAC (For personal computers) ; 154-272 VAC (For home appliances)
Frequency range	50Hz/60Hz (Auto sensing)
<b>Physical</b>	
Protection degree	IP20
Dimension (W/H/D)	365/650/247mm
Net weight	38.5kg
<b>Operating environment</b>	
Humidity	5% to 95% Relative Humidity (Non-condensing)
Operating temperature	-20°C - 50°C
Storage temperature	-40°C - 60°C