
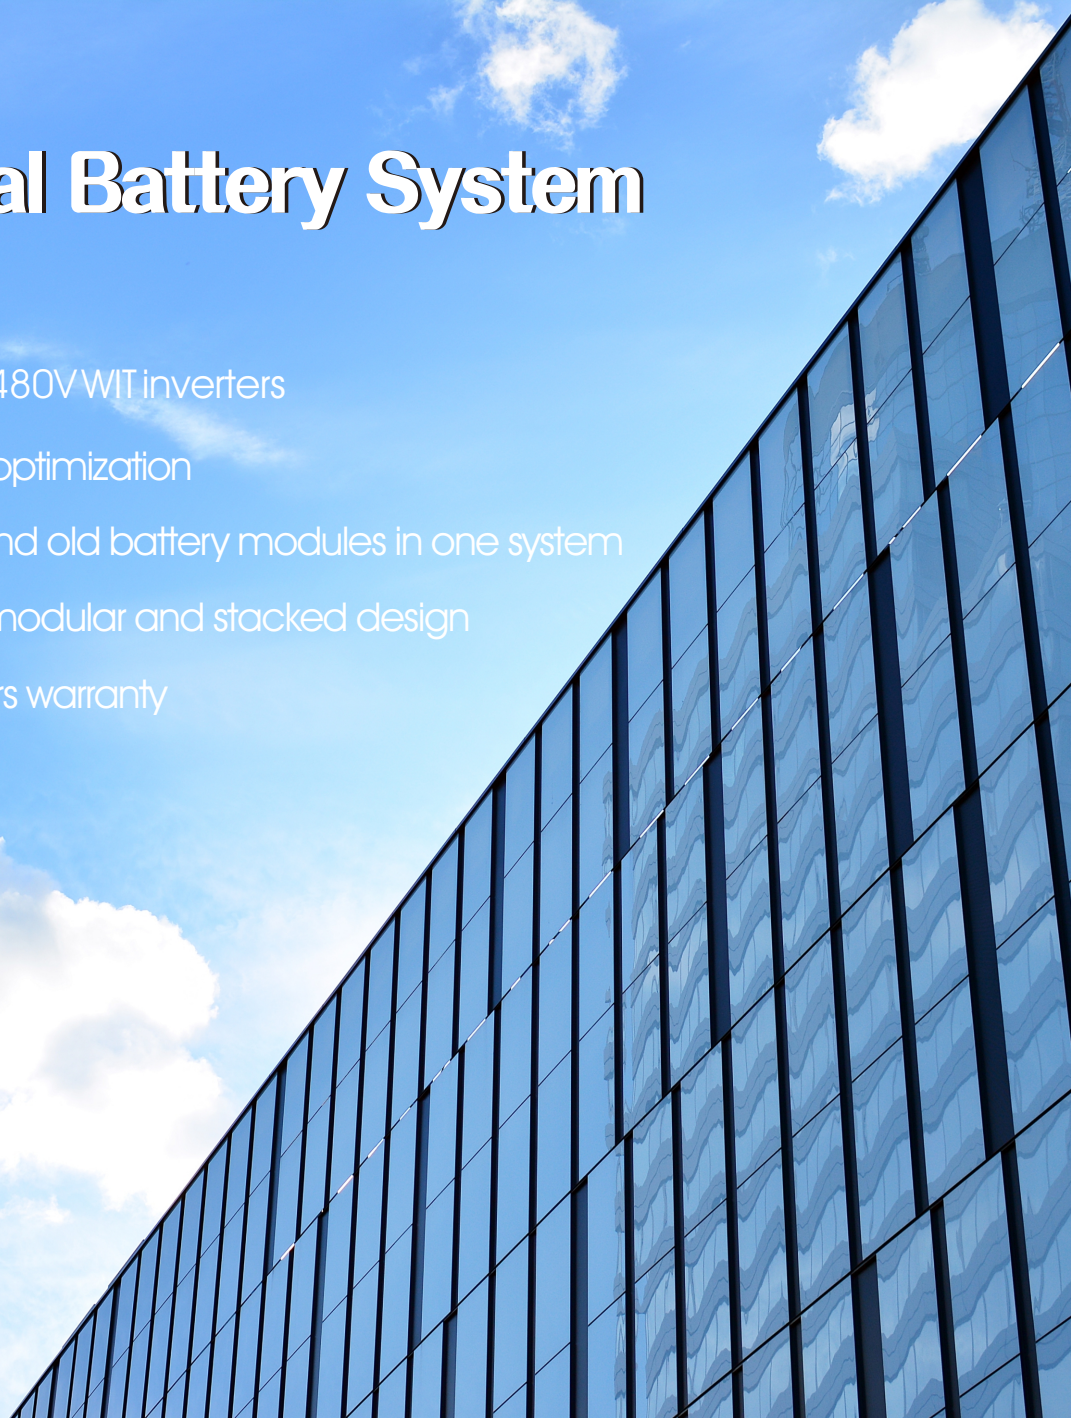


Commercial Battery System

APX 71~114kWh

- 71kWh ~ 114kWh for 480V WIT inverters
- Module level energy optimization
- Support to mix new and old battery modules in one system
- Easy installation with modular and stacked design
- Long lifespan, 10 years warranty

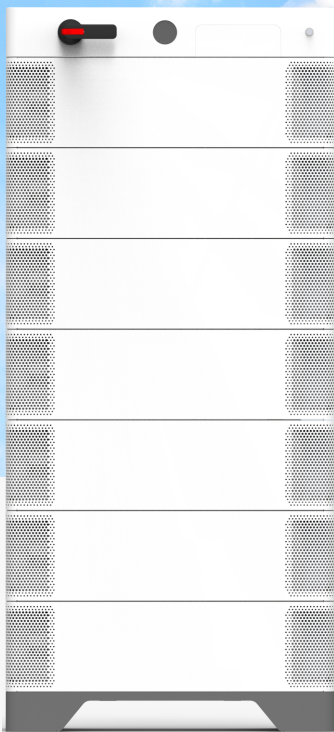

Preliminary Version

P O W E R
- I N G O
T O M O -
R R O W O

GROWATT

www.ginverter.com

Datasheet	APX 71.6P-S1-US	APX 86.0P-S1-US	APX 100.3P-S1-US	APX 114.6P-S1-US
System demo				
Control module	APX 1000125-P1-US			
Number of power modules	1			
Battery module	APX 14.3P-B1-US			
Battery module energy	14.33kWh			
Number of battery modules	5	6	7	8
Nominal energy	71.68kWh	86.01kWh	100.35kWh	114.68kWh
Rated energy	64.51kWh	77.41kWh	90.31kWh	103.21kWh
Max output power*1	35kW	43kW	50kW	57kW
Peak output power	57kW,60s	68kW,60s	80kW,60s	91kW,60s
Dimension (W/D/H) /column*2	920/510/1708mm/1 36.2/20.0/67.2inch/1	920/510/1956mm/1 36.2/20.0/77inch/1	920/510/1212mm/2 36.2/20.0/47.7inch/2	920/510/1460mm/2 36.2/20.0/57.4inch/2
Weight	748kg/1650lbs	883kg/1947lbs	1037kg/2286lbs	1172kg/2583lbs
Compatible Inverter	WIT 50-100kW/480V series inverter			
Nominal voltage	820V			
Operating voltage range	650V~945V			
Output full load voltage range	720V~880V			
Nominal capacity	280Ah(@25°C)			
Rated capacity	252Ah(@25°C)			
Battery type	Cobalt Free Lithium Iron Phosphate(LFP)			
Ingress protection	IP66/NEMA 4X			
Installation*3	Floor installation Extra battery base, W/D/H=36.2/20.0/4.3inch (920/510/110mm)			
DOD	90%			
Operating ambient temperature	-10°C~50°C			
Relative humidity	5%~95%			
Cooling	Smart air cooling			
Altitude	≤4000m (13123ft)			
Warranty	10 years			
Power Module	APX 1000125-P1-US			
Dimension(W/D/H)	920/510/358mm 36.2/20.0/14.1inch			
Weight	55kg/121.1lbs			
Communication port	CAN			
Operating voltage range	250V~950V			
Peak current	125A			
Monitoring parameters	SOC, system voltage, current, cell voltage, cell temperature, PCBA temperature			
Battery Module	APX 14.3P-B1-US			
Nominal energy	14.33kWh			
Expansion ability	Max. 14 units in series up to 200kWh			
Nominal voltage	80V			
Operating voltage range	0-105V			
Dimensions(W/D/H)	920/510/248mm 36.2/20.0/9.7inch			
Weight	135kg/297.6lbs			
UN38.3, UL1973, UL9540, UL9540A, FCC				

*1 Depend on the max. battery charge/discharge power of the inverter.

*2 Include power module (APX 1000125-P1-US)

*3 Floor installation requires extrabase (W*D*H=920/510/110mm)

*2023 SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. Subject to change without notice.